





6241B/6242B/ 6243B to BS 7211

Application and Description

These cables are suitable for fixed installation particularly for situations in which low emission smoke and domestic wiring cable for the surface wiring of sockets and lighting where fire, smoke emission and toxic fumes create a potential threat to life and equipment. Can be installed in fixed installations in dry or damp premises on walls, boards or trays, in channels or embedded in plaster. Suitable for laying in conduit or trunking where mechanical protection is required.

Cable Construction

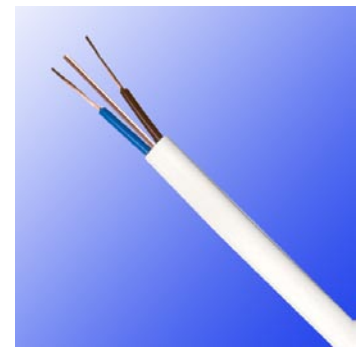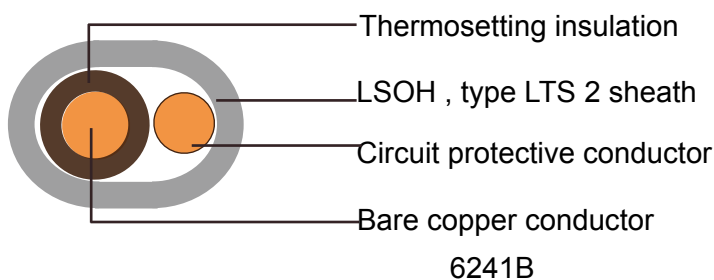


- Fine bare copper strands
- Stranding to IEC 60228 Class 1 or 2
- Thermosetting core insulation type EI5 or GP 8
- The core or cores shall be laid parallel with the uninsulated circuit protective conductor
- For twin cores, the protective conductor centrally placed between cores in same plane
- For 3 cores, the protective conductor centrally placed between black and grey cores in same plane
- LSOH sheath, type LTS 2, white


Core Identification

2 cores: brown and blue, or, for 2 × 1.0 and 2 × 1.5 cables, brown and brown

3 cores: brown, black (centre core) and grey

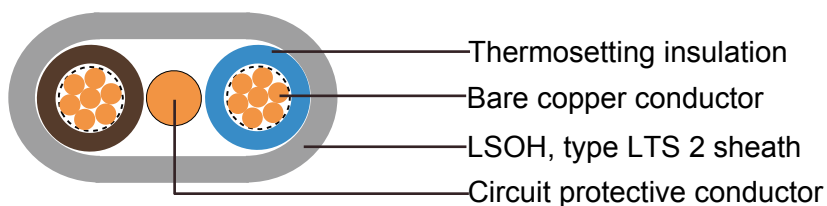

6242B

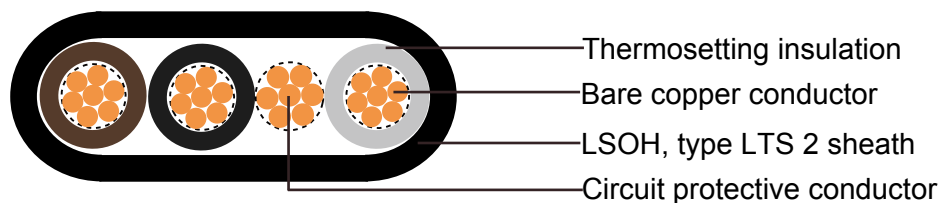

6243B

Technical Characteristics

- Working voltage: 300/500v
- Test voltage: 2000 volts
- Flexing bending radius: 15xOverall diameter
- Static bending radius: 10xOverall diameter
- Flexing temperature: +5° C to +90° C
- Short circuit temperature: +250° C
- Insulation resistance: 10 MΩxkm
- Halogen free acc. to EN 50267-2-1 / IEC 60754-1
- Smoke density acc. to EN 50268-2 / IEC 61034-2
- Corrosivity of gases acc. to EN 50267-2-2, IEC 60754-2
- Flame retardancy acc. to EN 50265-2-1, IEC 60332-1

Cable Parameter

AWG (No of Strands/ Strand Diameter)	No. of Cores x Nominal Cross Sectional Area #xmm ²	Nominal thickness of insulation mm	Nominal thickness of sheath mm	Nominal overall dimensions		Circuit protective conductor AWG	Nominal Weight kg/km
				lower limit mm	upper limit mm		
6241B							
17	1 × 1.0	0.7	0.9	4.1 × 5.2	5.0 × 6.3	17	45
16	1 × 1.5	0.7	0.9	4.4 × 5.4	5.3 × 6.6	17	55



AWG (No of Strands/ Strand Diameter)	No. of Cores x Nominal Cross Sectional Area #xmm ²	Nominal thickness of insulation mm	Nominal thickness of sheath mm	Nominal overall dimensions		Circuit protective conductor AWG	Nominal Weight kg/km
				lower limit mm	upper limit mm		
6242B							
17	2 × 1.0	0.7	0.9	4.1 × 7.6	5.0 × 9.1	17	68
17(7/26)	2 × 1.0	0.7	0.9	4.2 × 7.8	5.1 × 9.4	17	73
16	2 × 1.5	0.7	0.9	4.4 × 8.1	5.3 × 9.7	17	85
16(7/24)	2 × 1.5	0.7	0.9	4.5 × 8.3	5.4 × 10	17	90
14	2 × 2.5	0.7	1.0	4.9 × 9.3	6 × 11.2	16	120
14(7/22)	2 × 2.5	0.7	1.0	5.0 × 9.5	6.1 × 11.4	16	125
12(7/20)	2 × 4	0.7	1.0	5.5 × 10.4	6.7 × 12.6	16	175
10(7/18)	2 × 6	0.7	1.1	6.2 × 12.0	7.5 × 14.6	14	240
8(7/16)	2 × 10	0.7	1.2	7.3 × 14.5	8.8 × 17.6	12(7/20)	390
6(7/14)	2 × 16	0.7	1.3	8.4 × 17.0	10.1 × 20.5	10(7/18)	560
6243B							
17	3 × 1.0	0.7	0.9	4.1 × 10	5.1 × 12.1	17	91
16	3 × 1.5	0.7	0.9	4.4 × 10.7	5.3 × 12.9	17	115
14	3 × 2.5	0.7	1.0	4.9 × 12.0	6 × 14.6	17	170
12(7/20)	3 × 4	0.7	1.0	5.5 × 14	6.7 × 16.9	16	196
10(7/18)	3 × 6	0.7	1.1	6.2 × 16.2	7.5 × 19.5	14	291
8(7/16)	3 × 10	0.7	1.2	7.3 × 19.5	8.8 × 23.6	12(7/20)	440
6(7/14)	3 × 16	0.7	1.3	8.4 × 22.8	10.1 × 27.6	10(7/18)	670