

0.6/1KV Limited Fire Hazard/Fire Survival Multicore Armoured Cables to EME-SP-14-027

Applications

The cables are designed for station range installation typically in public help points (PHP), public address (PA), station announcement platforms (SAP) & CCTV camera power systems. The LSZH cables has been designed to provide superior flame retardance and circuit integrity if necessary, suitable for installation where fire, smoke emission and toxic fumes may create a potential threat.




Standards

- EME SP 14 027 (LUL version of BS 6724 for fire retardant version and BS 6387 for fire resisting version)
- UNE 21123

Construction

- Conductors: Stranded plain copper conductors to IEC 60228 class 2 or 5.
- Fire Barrier Tape (optional): Mica.
- Insulation: XLPE insulation.
- Bedding: LSZH bedding.
- Armoured: SWA.
- Outer Sheath: LSZH Sheath.

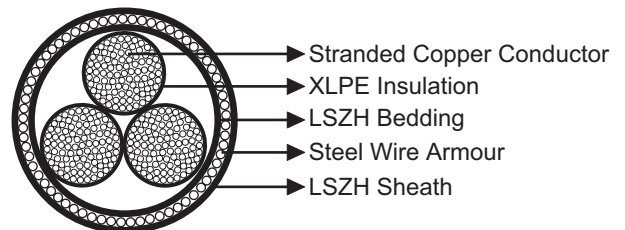

Electrical Characteristics at 20°C

Nominal Conductor Cross Section	mm ²	2.5	4.0	6.0	10.0	16.0	25.0	35.0	50
Maximum DC Conductor Resistance	Ω/km	7.41	4.61	3.08	1.83	1.15	0.727	0.524	0.387
Voltage Rating	KV	0.6/1.0							

Nominal Conductor Cross Section	mm ²	70.0	95	120	150	185	240	300
Maximum DC Conductor Resistance	Ω/km	0.268	0.193	0.153	0.124	0.0991	0.0754	0.0601
Voltage Rating	KV	0.6/1.0						

Mechanical and Thermal Properties

- Minimum Bending Radius: 8×OD
- Operating Temperatures: 0°C to +90°C (during operation); 0°C to +70°C (during installation)



Dimensions and Weight

Cables without fire barrier tape

Cable Code	No. of cores & Nominal Conductor Cross Sectional Area No. x mm ²	No. & Nominal Diameter of Strands No/mm	Nominal Sheath Thickness mm	Nominal Overall Diameter mm	Nominal Weight kg/km
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G2.5	2x2.5*	7/0.67	1.4	12.2	323
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G4	2x4.0*	7/0.85	1.4	13.3	387
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G6	2x6.0*	7/1.04	1.4	14.4	460
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G10	2x10.0*	7/1.35	1.5	16.1	611
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G16	2x16.0*	7/1.70	1.5	18.7	904
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G25	2x25.0	7/2.14	1.6	21.0	1050
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G35	2x35.0	19/1.53	1.7	22.0	1450
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G50	2x50.0	19/1.78	1.8	24.0	1800
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G70	2x70.0	19/2.14	1.9	27.0	2300
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G95	2x95.0	37/1.78	2.0	32.0	3250
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G120	2x120.0	37/2.03	2.1	35.0	3950
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G150	2x150.0	37/2.25	2.2	38.0	4650
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G185	2x185.0	37/2.52	2.4	43.0	6050
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G240	2x240.0	61/2.25	2.5	49.0	7500
RF14027-RZ1MZ1-U(AS)-0.6/1KV-2G300	2x300.0	61/2.52	2.6	54.0	9050
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G2.5	3x2.5*	7/0.67	1.4	12.1	335
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G4	3x4.0*	7/0.85	1.4	13.3	430
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G6	3x6.0*	7/1.04	1.4	14.4	523
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G10	3x10.0*	7/1.35	1.5	17.0	811
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G16	3x16.0*	7/1.70	1.6	19.3	1072
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G25	3x25.0	7/2.14	1.7	24.0	1750
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G35	3x35.0	19/1.53	1.8	27.0	2000
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G50	3x50.0	19/1.78	1.8	28.0	2450
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G70	3x70.0	19/2.14	1.9	32.0	3250
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G95	3x95.0	37/1.78	2.1	36.0	4500
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G120	3x120.0	37/2.03	2.2	40.0	5350
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G150	3x150.0	37/2.25	2.3	44.0	6900
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G185	3x185.0	37/2.52	2.4	49.0	8200
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G240	3x240.0	61/2.25	2.6	56.0	10350
RF14027-RZ1MZ1-U(AS)-0.6/1KV-3G300	3x300.0	61/2.52	2.7	62.0	12600
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G2.5	4x2.5*	7/0.67	1.4	13.6	406
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G4	4x4.0*	7/0.85	1.4	14.9	505
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G6	4x6.0*	7/1.04	1.5	17.1	737
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G10	4x10.0*	7/1.35	1.5	18.9	969
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G16	4x16.0*	7/1.70	1.6	21.5	1303
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G25	4x25.0	7/2.14	1.7	27.0	2100
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G35	4x35.0	19/1.53	1.8	29.0	2450
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G50	4x50.0	19/1.78	1.9	32.0	3100
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G70	4x70.0	19/2.14	2.1	37.0	4400
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G95	4x95.0	37/1.78	2.2	41.0	5650
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G120	4x120.0	37/2.03	2.3	46.0	7300
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G150	4x150.0	37/2.25	2.4	51.0	8700
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G185	4x185.0	37/2.52	2.6	55.0	10450
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G240	4x240.0	61/2.25	2.7	63.0	13250
RF14027-RZ1MZ1-U(AS)-0.6/1KV-4G300	4x300.0	61/2.52	2.9	68.0	16100

*Circular conductors

U is changed to K if the stranding class is changed from class 2 to class 5

Cables with fire barrier tape

Cable Code	No. of cores& Nominal Conductor Cross Sectional Area No. ×mm ²	No. & Nominal Diameter of Strands No/mm	Nominal Sheath Thickness mm	Nominal Overall Diameter mm	Nominal Weight kg/km
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G2.5	2×2.5	7/0.67	1.4	13.1	352
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G4	2×4.0	7/0.85	1.4	14.1	424
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G6	2×6.0	7/1.04	1.4	15.2	504
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G10	2×10.0	7/1.35	1.5	16.9	620
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G16	2×16.0	7/1.70	1.5	19.5	954
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G25	2×25.0	7/2.14	1.6	25.5	1330
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G35	2×35.0	19/1.53	1.7	29.1	1785
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G50	2×50.0	19/1.78	1.8	32.2	2165
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G70	2×70.0	19/2.14	1.9	28.8	2445
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G95	2×95.0	37/1.78	2.0	33.9	3385
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G120	2×120.0	37/2.03	2.1	37.2	4065
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G150	2×150.0	37/2.25	2.2	39.9	4745
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G185	2×185.0	37/2.52	2.4	45.0	6095
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G240	2×240.0	61/2.25	2.5	50.0	7575
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-2G300	2×300.0	61/2.52	2.6	55.0	9165
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G2.5	3×2.5	7/0.67	1.4	13.7	392
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G4	3×4.0	7/0.85	1.4	14.8	478
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G6	3×6.0	7/1.04	1.4	16.0	573
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G10	3×10.0	7/1.35	1.5	18.5	868
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G16	3×16.0	7/1.70	1.6	20.8	1136
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G25	3×25.0	7/2.14	1.7	27.6	1865
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G35	3×35.0	19/1.53	1.8	30.9	2235
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G50	3×50.0	19/1.78	1.8	33.9	2735
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G70	3×70.0	19/2.14	1.9	35.7	3355
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G95	3×95.0	37/1.78	2.1	38.2	4580
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G120	3×120.0	37/2.03	2.2	41.6	5505
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G150	3×150.0	37/2.25	2.3	47.0	6950
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G185	3×185.0	37/2.52	2.4	50.5	8295
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G240	3×240.0	61/2.25	2.6	57.2	10455
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-3G300	3×300.0	61/2.52	2.7	63.2	12660
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G2.5	4×2.5	7/0.67	1.4	14.7	454
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G4	4×4.0	7/0.85	1.4	16.0	556
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G6	4×6.0	7/1.04	1.5	18.2	783
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G10	4×10.0	7/1.35	1.5	20.0	1029
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G16	4×16.0	7/1.70	1.6	22.5	1367
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G25	4×25.0	7/2.14	1.7	29.9	2240
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G35	4×35.0	19/1.53	1.8	33.5	2705
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G50	4×50.0	19/1.78	1.9	37.1	3375
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G70	4×70.0	19/2.14	2.1	39.1	4560
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G95	4×95.0	37/1.78	2.2	43.0	5805
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G120	4×120.0	37/2.03	2.3	48.3	7430
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G150	4×150.0	37/2.25	2.4	52.4	8820
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G185	4×185.0	37/2.52	2.6	56.6	10600
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G240	4×240.0	61/2.25	2.7	64.3	13380
RF14027-RZ1MZ1-U-MICA(AS+)-0.6/1KV-4G300	4×300.0	61/2.52	2.9	70.7	16255

U is changed to K if the stranding class is changed from class 2 to class 5



Impact Resistant



Highly Flexible



Oil Resistant



Weather Resistant



Laid In Ducts



Insulation Integrity FE180
EN 50200/IEC 60331
/NF C32-070-2.3(CR1)